


施 工-3

材料歩掛り

ベースコンクリートなしの場合

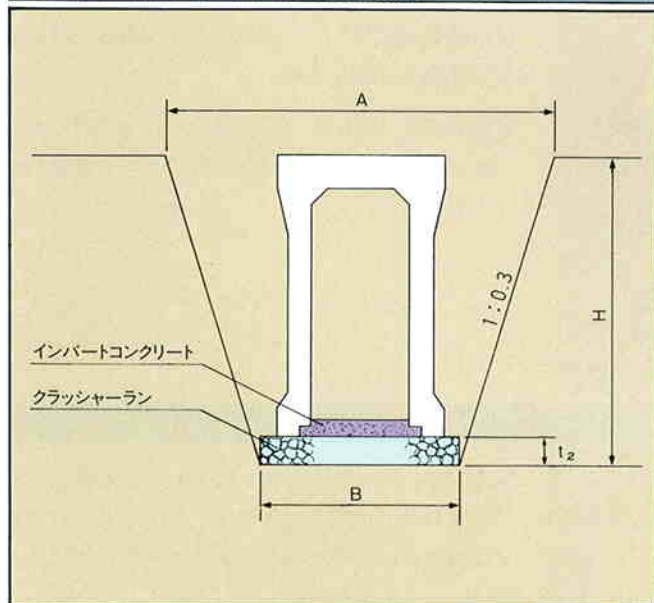

タイプ	t ₂ (mm)
300	75
400	75
500	100
600	100

(10m当り)

呼び名 (巾×深)	寸法 (mm)			土工 (m ³)			材 料				備 考
	H	A	B	床 堀	埋 戻	残 土	クラッシャー ラン(m ³)	本体(m)	蓋板(枚)	目地 モルタル(m ²)	
300× 300	520	882	570	3.78	1.35	2.42	0.428	5.0	10.0	0.0011	(1) 埋戻、残土量の体積変化による土量 変化は考慮していない。 (2) 現場打ち底部コンクリートの歩掛りは 別途計上願います。
× 400	620	942		4.69	1.81	2.87				0.0013	
× 500	720	1,002		5.66	2.38	3.28				0.0015	
× 600	820	1,062		6.69	2.90	3.79				0.0017	
× 700	920	1,122		7.78	3.57	4.22				0.0020	
× 800	1,020	1,182		8.94	4.16	4.78				0.0022	
× 900	1,120	1,242		10.15	4.92	5.23				0.0024	
×1,000	1,220	1,302		11.42	5.57	5.85				0.0026	
×1,100	1,320	1,362		12.75	6.44	6.32				0.0028	
400× 400	635	1,061		680	5.53	1.91				3.62	
× 500	735	1,121	6.62		2.45	4.17	0.0015				
× 600	835	1,181	7.77		3.08	4.69	0.0018				
× 700	935	1,241	8.98		3.66	5.33	0.0020				
× 800	1,035	1,301	10.25		4.39	5.87	0.0022				
× 900	1,135	1,361	11.58		5.03	6.55	0.0024				
×1,000	1,235	1,421	12.97		5.86	7.11	0.0026				
×1,100	1,335	1,481	14.42		6.57	7.86	0.0029				
×1,200	1,435	1,541	15.94		7.50	8.44	0.0031				
500× 600	875	1,315	790		9.21	3.22	5.99	0.790	5.0	10.0	0.0023
× 700	975	1,375		10.55	3.93	6.63	0.0026				
× 800	1,075	1,435		11.96	4.69	7.27	0.0030				
× 900	1,175	1,495		13.42	5.30	8.13	0.0033				
×1,000	1,275	1,555		14.95	6.15	8.80	0.0036				
×1,100	1,375	1,615		16.53	7.07	9.47	0.0039				
×1,200	1,475	1,675		18.18	7.84	10.34	0.0043				
×1,300	1,575	1,735		19.88	8.85	11.03	0.0046				
×1,400	1,675	1,795		21.65	9.93	11.73	0.0049				
600× 700	990	1,495		900	11.85	4.02	7.83				0.900
× 800	1,090	1,554	13.37		4.80	8.58	0.0030				
× 900	1,190	1,614	14.96		5.63	9.33	0.0033				
×1,000	1,290	1,674	16.60		6.27	10.33	0.0036				
×1,100	1,390	1,734	18.31		7.20	11.11	0.0039				
×1,200	1,490	1,794	20.07		8.18	11.89	0.0043				
×1,300	1,590	1,854	21.89		9.00	12.89	0.0046				
×1,400	1,690	1,914	23.78		10.09	13.69	0.0049				
×1,500	1,790	1,974	25.72		11.23	14.49	0.0052				